

Specifications
TFT-LCD module

Model No: AML-FRD350C45146-IPS

Customer Name:

For Customer's Acceptance	
Approved by	Comment

	Signature	Date
Prepared by		
Checked by		
Approved by		

Revision Record

VEV NO.	REV DATE	CONTENTS	Note
A	2016-12-08	NEW ISSUE	

深圳市阿美林电子科技有限公司
Shenzhen Amelin Electronic Technology Co. Ltd.

Table Of Contents

List	Description	Page No.
	Cover	1
	Revision Record	2
	Table Of Contents	3
1	General Information	4
2	Absolute Maximum Ratings	4
3	Backlight Charasterics	4
4	External Dimensions	5
5	Interface Descrition	6
6	Reliability Test Conditions And Methods	7
7	Inspection Standard	8-9
8	Handling Precautions	10-11
9	Precaution For Use	11
10	Packing Method	12
11		--
12		--
13		--
14		--

深圳市阿美林电子科技有限公司

Shenzhen Amelin Electronic Technology Co. Ltd.

1. General information

ITEM	STANDARD VALUES	UNITS
LCD type	3.5" TFT	--
Dot arrangement	320 (RGB) × 480	dots
Driver IC	HX8357D	--
Module size	54.48(W) × 84.71(H) × 3.3(T)	mm
Active area	48.96(W) × 73.44 (H)	mm
Dot pitch	0.153*0.153	mm
Operating temperature	- 10 ~ + 60	°C
Storage temperature	- 20 ~ + 70	°C
Back Light	6 White LED In Parallel	--
Weight	TBD	g
Viewing Direction	ALL (6 O' Clock)	--
PoL (UP)	51.56*75.94*0.13 0° Anti Glare	°
PoL (DOW)	51.56*76.54*0.15 90° BEP	°

2 .Absolute Maximum Ratings

ITEM	Symbol	MIN	MAX	UNITS
Power supply voltage 1	VCC	2.8	3.3	V
Power supply voltage 1	IOVCC	1.8	3.3	V
Operating temperature	Topr	-10	+60	°C
Storage temperature	Tstg	-20	+70	°C
Humidity	RH	---	90%(Max40°C)	RH

3.Backlight Characteristics

LED CIRCUIT DIAGRAM:



Item	Symbol	MIN	TYP	MAX	UNIT	Test Condition	Note
Uniformity	-	80%				If=20 mA	
Supply Voltage	Vf	18.8	19.2	19.6	V		-
Supply Current	If	-	20	-	mA		-
Reverse Voltage	Vr	-	-	5	V	10uA	
Power dissipation	Pd	-	384	-	mW	-	
Luminous Intensity f or LCM		-	6000	-	mCd/m²	If=20 mA	260cd/m2 (LCM)
Uniformity for LCM	-	80	-	-	%	If=20 mA	
Life Time	-	50000	-	-	Hr	If=20 mA	-
Backlight Color	White (X,Y, 0.306-0.318)						
Contrast ratio	CR	-	700	-			

深圳市阿美林电子科技有限公司
Shenzhen Amelin Electronic Technology Co. Ltd.

5. Interface Description

PIN NO	SYMBOL	DESCRIPTION
1	GND	System Ground
2	LED_A	Power Supply For LED Backlight Anode Input
3	LED_A	Power Supply For LED Backlight Anode Input
4	LED_K	Power Supply For LED Backlight Cathode Input
5	LED_K	Power Supply For LED Backlight Cathode Input
6	GND	System Ground
7	GND	System Ground
8	VCC	Power Supply For LCD 2.8V
9	IOVCC	Power Supply For LCD 1.8/2.8V
10	RESET	Reset Signal
11	VSYNC	Frame Synchronizing Signal For RGB Interface Operation
12	HSYNC	Line Synchronizing Signal For RGB Interface Operation
13	GND	System Ground
14	DOTCLK	Dot Clock Signal For RGB Interface Operation
15	GND	System Ground
16	DE	Data Input Enable
17	DB17	Data Bus
18	DB16	Data Bus
19	DB15	Data Bus
20	DB14	Data Bus
21	DB13	Data Bus
22	DB12	Data Bus



深圳市阿美林电子科技有限公司
Shenzhen Amelin Electronic Technology Co. Ltd.

23	DB11	Data Bus
24	DB10	Data Bus
25	DB9	Data Bus
26	DB8	Data Bus
27	DB7	Data Bus
28	DB6	Data Bus
29	DB5	Data Bus
30	DB4	Data Bus
31	DB3	Data Bus
32	DB2	Data Bus
33	DB1	Data Bus
34	DB0	Data Bus
35	SD0	Serial data output
36	SDI	Serial data input
37	RDX	Read Signal And Read Data
38	WRX/SCL	The pin used as serial clock pin
39	D_SCL	parameter select.
40	CSX	Chip Select PIN
41	TE	Tearing Effect Output Signal
42	XR	Touch Panel PIN
43	YD	Touch Panel PIN
44	XL	Touch Panel PIN
45	YU	Touch Panel PIN

6. Reliability Test Conditions And Methods

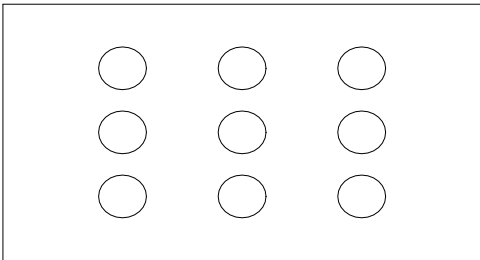
NO	Item	Condition	Method
1	High / Low Temperature Storage	60℃/-10℃ 500hrs	Check and record every 96Hrs
2	High / Low Temperature Life	50℃/-10℃ 500hrs (operating mode)	Check and record every 96Hrs
3	High Temperature、High Humidity Operating	40℃ 90% RH, 120Hrs	Check and record every 48hrs
4	Thermal Shock	-20℃(30Min) → 25℃(5Min) → 70℃(30Min) (conversion time, : 5 sec) 20 cycles	Each 10 cycles end , check
5	Vibration	10Hz~55Hz~10Hz Amplitude: 1.5mm 2hrs for each direction(X,Y,Z)	Each direction end, Check the Appearance and Electrical Characteristics
6	Static Electricity	Gap mood: ±1KV~±8KV (10 times air discharge with positive/negative voltage voltage gap : 1kv) Touch mood: ±1KV~±2KV	Each discharge end, Check the Electrical Characteristics
7	Slump	Free faller movement for each side、cording、angle (75cm High、 6 sides、 2 angle、 2 cording)	End

7. Inspection Standard

No	Item	Criterion																		
01	Outline Dimension	In accord with drawing																		
02	Position-fin ding Dimension Assemble Dimension	In accord with drawing																		
03	LCD black spots, white spots (Round type)	<div>Round type: non display</div> <div>Unit : mm</div> <div></div> <table><thead><tr><th>Dimension</th><th>Qualified Quantity</th></tr></thead><tbody><tr><td>$D \leq 0.1$</td><td>Ignore</td></tr><tr><td>$0.1 < D \leq 0.15$</td><td>3</td></tr><tr><td>$0.15 < D \leq 0.25$</td><td>2</td></tr><tr><td>$D > 0.25$</td><td>0</td></tr></tbody></table>	Dimension	Qualified Quantity	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.15$	3	$0.15 < D \leq 0.25$	2	$D > 0.25$	0								
Dimension	Qualified Quantity																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.15$	3																			
$0.15 < D \leq 0.25$	2																			
$D > 0.25$	0																			
04	LCD black spots, white spots (Line Style)	<div>Unit : mm</div> <div></div> <table><thead><tr><th>Length</th><th>Width</th><th>Qualified Quantity</th></tr></thead><tbody><tr><td>-</td><td>≤ 0.02</td><td>Ignore</td></tr><tr><td>≤ 3</td><td rowspan="2">$0.02 < W \leq 0.03$</td><td>2</td></tr><tr><td></td><td></td></tr><tr><td>≤ 2</td><td>$0.03 < W \leq 0.05$</td><td>1</td></tr><tr><td>-</td><td>$D > 0.05$</td><td>According to circle</td></tr></tbody></table>	Length	Width	Qualified Quantity	-	≤ 0.02	Ignore	≤ 3	$0.02 < W \leq 0.03$	2			≤ 2	$0.03 < W \leq 0.05$	1	-	$D > 0.05$	According to circle	
Length	Width	Qualified Quantity																		
-	≤ 0.02	Ignore																		
≤ 3	$0.02 < W \leq 0.03$	2																		
≤ 2	$0.03 < W \leq 0.05$	1																		
-	$D > 0.05$	According to circle																		
05	LCD Scratch 、 Threadlike Fiber	Same to NO.3 circle sightline and surface of LCD is vertical (2)Same to NO.3 line style																		

深圳市阿美林电子科技有限公司

Shenzhen Amelin Electronic Technology Co. Ltd.

06	POL	<p>It is not admissible that POL is beyond the edge of glass, else, unqualified.</p> <p>It is essential that POL is over the 50 percent of width of frame , else ,unqualified.</p> <p>According to the drawing in case of special definition.</p>		
07	Brightness	In accord with product specification	<p>Drive condition is according to specification</p> <p>Measure location is in Follow Picture 3 、 Adjust brightness instrument to zero , burrow against the surface of LCD , press “measure” , record when the display is steady. (YOKOGAWA-3298)</p>	
			 <p style="text-align: center;">Measure location</p>	
08	CR (Max)	According to specification	According to product specification Measure instrument (DMS-501)	
09	Response time	According to specification	According to product specification Measure instrument (DMS-501)	
10	Viewing angle	According to specification	According to product specification Measure instrument (DMS-501)	
11	Vibration、Ring	Compare with the sample customer supply	Compare with the sample customer supply when assemble	

8 . Handling Precautions

8.1 Mounting method

The LCD panel of SC LCD LCD module consists of two thin glass plates with polarizes which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

8.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent
[recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happens by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

8.3 Caution against static charge

The LCD module uses C-MOS LSI drivers, so we recommend that you:

Connect any unused input terminal to Vdd or Vss, do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

8.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

8.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.

深圳市阿美林电子科技有限公司

Shenzhen Amelin Electronic Technology Co. Ltd.

A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.

8.6 storage

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it . And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

8.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

9. Precaution For Use

9.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

9.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to SC LCD , and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

10 Packing Method

TBD